



In case of required assistance call us under: +49 (0)341-49 579 232.



**Mitsubishi L200 Series 5 15>**




**1) Please check you have all the required parts before starting installation:**

- 1 x Base plate and actuator kit
- 1 x Wiring loom
- 2 x Scotch Locks (you can solder the connections if preferred)
- 8-10 x Cable Ties
- Conduct Tubing


**1) Open Tailgate, Undo 10 screws and remove metal panel to allow access into the inside of the tailgate**



**2) Remove the two screws that hold the tailgate handle into the tailgate**

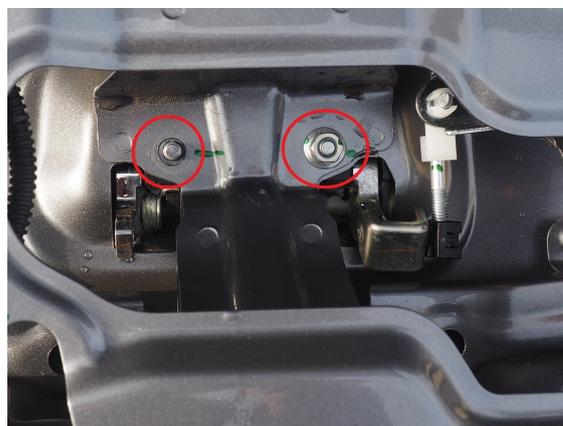


**3) Install the base plate and actuator kit, hold in place by replacing the removed screws from no.2**

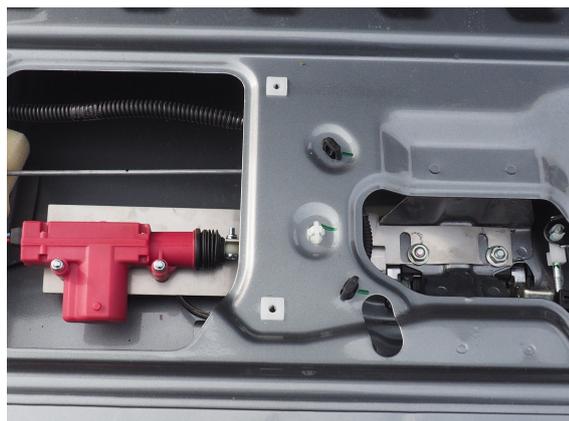

**4) Connect wiring loom to the actuator:**

**Red to Red and Blue to Black**

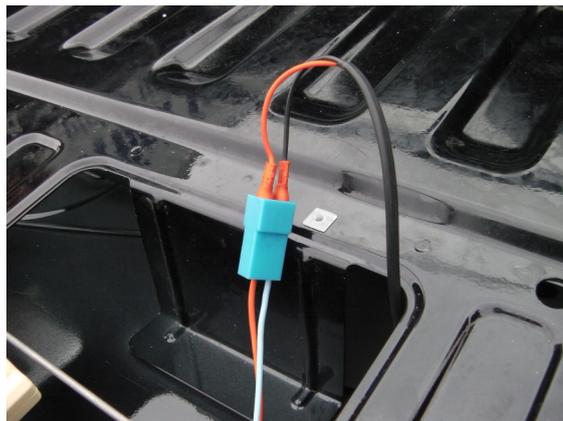


**5) Feed Cable out of the tailgate on Passengers side, Use tubing provided to Protect Cable**




**6) Feed Cable along the passengers side of the vehicle and up into the passengers foot well**


**8) Remove passengers side door Sill Guard and Kick Plate to access vehicles wiring harness**

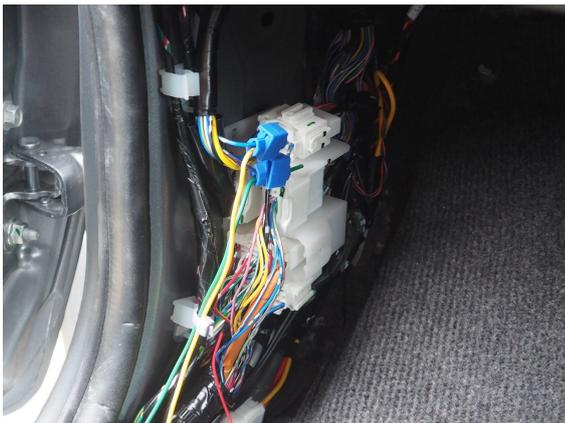

**8) Connect the Central locking kit into the vehicles Central locking Loom**

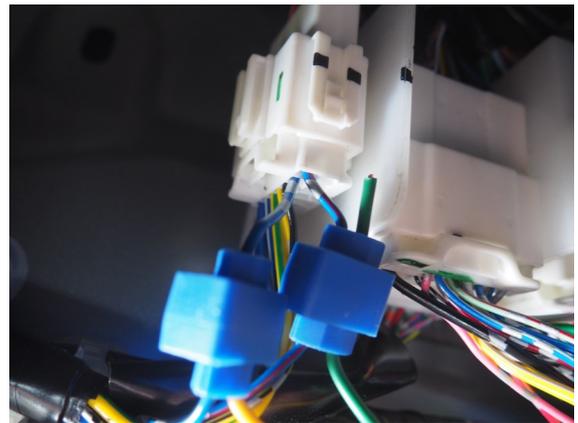

**9) Connect cables using the scotch locks (or solder) please ensure the cables get a good connection**

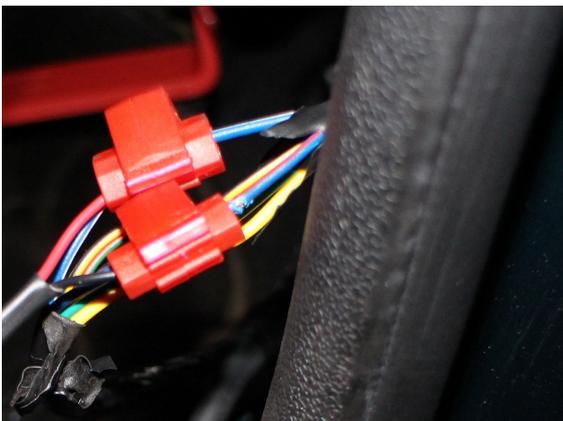

Eagle1 Lock wiring Loom	Vehicle Loom
Red	Blue with Black trace
Black	Blue with red trace

**10) Test the kit works by clicking the central locking and see if the tailgate locks / unlocks.**

**11) If everything works replace tailgate cover**

**\*Please note we always advise to cover any connections with electrical tape**